

























































5/3-directional valve, Series 581, size 1

- ISO 5599-1
- ISO 1
- 5/3
- pressurized center
- $Q_n = 1100$ l/min
- Compressed air connection output Base plate ISO 5599-1
- Electrical connection Plug, Form B, industry
- Manual override with detent



| | |
|----------------------------------|-----------------------------|
| Type | Spool valve |
| Sealing principle | Soft sealing |
| Blocking principle | Single base plate principle |
| Connection type | Plate connection |
| Standards | ISO 5599-1, ISO 1 |
| Working pressure min./max. | See table below |
| Control pressure min./max. | 3 ... 10 bar |
| Ambient temperature min./max. | -15 ... 50 °C |
| Medium temperature min./max. | -15 ... 50 °C |
| Medium | Compressed air |
| Max. particle size | 50 µm |
| Oil content of compressed air | 0 ... 5 mg/m ³ |
| Nominal flow Q_n | 1100 l/min |
| Flow conductance C | 4,3 l/(s*bar) |
| Protection class with connection | IP65 |
| Duty cycle | 100 % |
| Typ. switch-on time | 14 ms |
| Typ. switch-off time | 32 ms |
| Mounting screw | with hexagon socket |
| Mounting screw tightening torque | 2 Nm |
| Weight | 0,3 kg |

Technical data

| Part No. | | MO | | Operational voltage DC |
|------------|---|---|--------------------|------------------------|
| 5811720500 |  |  | pressurized center | 12 V |
| 5811720200 |  |  | pressurized center | - |
| 5811720100 |  |  | pressurized center | 24 V |
| 5811720600 |  |  | pressurized center | 48 V |
| 5811720300 |  |  | pressurized center | - |
| 5811720400 |  |  | pressurized center | - |
| 5811720000 |  |  | pressurized center | - |
| 5811721500 |  |  | pressurized center | 12 V |
| 5811721200 |  |  | pressurized center | - |
| 5811721100 |  |  | pressurized center | 24 V |
| 5811721600 |  |  | pressurized center | 48 V |
| 5811721300 |  |  | pressurized center | - |
| 5811721400 |  |  | pressurized center | - |
| 5811721000 |  |  | pressurized center | - |
| 5811722500 |  |  | pressurized center | 12 V |
| 5811722200 |  |  | pressurized center | - |
| 5811722100 |  |  | pressurized center | 24 V |
| 5811722600 |  |  | pressurized center | 48 V |
| 5811722300 |  |  | pressurized center | - |
| 5811722400 |  |  | pressurized center | - |
| 5811722000 |  |  | pressurized center | - |
| 5811723500 |  |  | pressurized center | 12 V |
| 5811723200 |  |  | pressurized center | - |
| 5811723100 |  |  | pressurized center | 24 V |
| 5811723600 |  |  | pressurized center | 48 V |
| 5811723300 |  |  | pressurized center | - |
| 5811723400 |  |  | pressurized center | - |
| 5811723000 |  |  | pressurized center | - |

| Part No. | Operational voltage AC 50 Hz | Operational voltage AC 60 Hz | Voltage tolerance DC |
|------------|------------------------------|------------------------------|----------------------|
| 5811720500 | - | - | -10% / +10% |
| 5811720200 | 24 V | - | - |
| 5811720100 | - | - | -10% / +10% |
| 5811720600 | - | - | -10% / +10% |
| 5811720300 | - | 110 V | - |
| 5811720400 | 230 V | - | - |
| 5811720000 | - | - | - |
| 5811721500 | - | - | -10% / +10% |
| 5811721200 | 24 V | - | - |
| 5811721100 | - | - | -10% / +10% |
| 5811721600 | - | - | -10% / +10% |
| 5811721300 | - | 110 V | - |

| Part No. | Operational voltage AC 50 Hz | Operational voltage AC 60 Hz | Voltage tolerance DC |
|------------|---------------------------------|---------------------------------|-------------------------|
| 5811721400 | 230 V | - | - |
| 5811721000 | - | - | - |
| 5811722500 | - | - | -10% / +10% |
| 5811722200 | 24 V | - | - |
| 5811722100 | - | - | -10% / +10% |
| 5811722600 | - | - | -10% / +10% |
| 5811722300 | - | 110 V | - |
| 5811722400 | 230 V | - | - |
| 5811722000 | - | - | - |
| 5811723500 | - | - | -10% / +10% |
| 5811723200 | 24 V | - | - |
| 5811723100 | - | - | -10% / +10% |
| 5811723600 | - | - | -10% / +10% |
| 5811723300 | - | 110 V | - |
| 5811723400 | 230 V | - | - |
| 5811723000 | 230 V | - | - |

| Part No. | Voltage tolerance AC 50 Hz | Voltage tolerance AC 60 Hz | Power consumption DC | Holding power AC 50 Hz |
|------------|-------------------------------|-------------------------------|-------------------------|---------------------------|
| 5811720500 | - | - | 5 W | - |
| 5811720200 | -10% / +10% | - | - | 8 VA |
| 5811720100 | - | - | 5 W | - |
| 5811720600 | - | - | 5 W | - |
| 5811720300 | - | -10% / +10% | - | - |
| 5811720400 | -10% / +10% | - | - | 8 VA |
| 5811720000 | - | - | - | - |
| 5811721500 | - | - | 5 W | - |
| 5811721200 | -10% / +10% | - | - | 8 VA |
| 5811721100 | - | - | 5 W | - |
| 5811721600 | - | - | 5 W | - |
| 5811721300 | - | -10% / +10% | - | - |
| 5811721400 | -10% / +10% | - | - | 8 VA |
| 5811721000 | - | - | - | - |
| 5811722500 | - | - | 5 W | - |
| 5811722200 | -10% / +10% | - | - | 8 VA |
| 5811722100 | - | - | 5 W | - |
| 5811722600 | - | - | 5 W | - |
| 5811722300 | - | -10% / +10% | - | - |
| 5811722400 | -10% / +10% | - | - | 8 VA |
| 5811722000 | - | - | - | - |
| 5811723500 | - | - | 5 W | - |
| 5811723200 | -10% / +10% | - | - | 8 VA |
| 5811723100 | - | - | 5 W | - |
| 5811723600 | - | - | 5 W | - |
| 5811723300 | - | -10% / +10% | - | - |
| 5811723400 | -10% / +10% | - | - | 8 VA |
| 5811723000 | -10% / +10% | - | - | 8 VA |

| Part No. | Holding power AC 60 Hz | Switch-on power AC 50 Hz | Switch-on power AC 60 Hz | Pilot |
|------------|---------------------------|-----------------------------|-----------------------------|----------|
| 5811720500 | - | - | - | Internal |
| 5811720200 | - | 10 VA | - | Internal |
| 5811720100 | - | - | - | Internal |
| 5811720600 | - | - | - | Internal |
| 5811720300 | 8 VA | - | 10 VA | Internal |
| 5811720400 | - | 10 VA | - | Internal |
| 5811720000 | - | - | - | Internal |
| 5811721500 | - | - | - | Internal |
| 5811721200 | - | 10 VA | - | Internal |
| 5811721100 | - | - | - | Internal |
| 5811721600 | - | - | - | Internal |
| 5811721300 | 8 VA | - | 10 VA | Internal |
| 5811721400 | - | 10 VA | - | Internal |
| 5811721000 | - | - | - | Internal |
| 5811722500 | - | - | - | External |
| 5811722200 | - | 10 VA | - | External |
| 5811722100 | - | - | - | External |
| 5811722600 | - | - | - | External |
| 5811722300 | 8 VA | - | 10 VA | External |
| 5811722400 | - | 10 VA | - | External |
| 5811722000 | - | - | - | External |
| 5811723500 | - | - | - | External |
| 5811723200 | - | 10 VA | - | External |
| 5811723100 | - | - | - | External |
| 5811723600 | - | - | - | External |
| 5811723300 | 8 VA | - | 10 VA | External |
| 5811723400 | - | 10 VA | - | External |
| 5811723000 | - | 10 VA | - | External |

| Part No. | Working pressure min./max. | Electrical connection Pilot valve |
|------------|----------------------------|--------------------------------------|
| 5811720500 | 3 ... 10 bar | Plug Form B, industry |
| 5811720200 | 3 ... 10 bar | Plug Form B, industry |
| 5811720100 | 3 ... 10 bar | Plug Form B, industry |
| 5811720600 | 3 ... 10 bar | Plug Form B, industry |
| 5811720300 | 3 ... 10 bar | Plug Form B, industry |
| 5811720400 | 3 ... 10 bar | Plug Form B, industry |
| 5811720000 | 3 ... 10 bar | Plug Form B, industry |
| 5811721500 | 3 ... 10 bar | Plug Form B, industry |
| 5811721200 | 3 ... 10 bar | Plug Form B, industry |
| 5811721100 | 3 ... 10 bar | Plug Form B, industry |
| 5811721600 | 3 ... 10 bar | Plug Form B, industry |
| 5811721300 | 3 ... 10 bar | Plug Form B, industry |
| 5811721400 | 3 ... 10 bar | Plug Form B, industry |
| 5811721000 | 3 ... 10 bar | Plug Form B, industry |
| 5811722500 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811722200 | -0,95 ... 10 bar | Plug Form B, industry |

| Part No. | Working pressure min./max. | Electrical connection Pilot valve |
|------------|----------------------------|--------------------------------------|
| 5811722100 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811722600 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811722300 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811722400 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811722000 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723500 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723200 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723100 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723600 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723300 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723400 | -0,95 ... 10 bar | Plug Form B, industry |
| 5811723000 | -0,95 ... 10 bar | Plug Form B, industry |

| Part No. | basic valve with electrical connector | Throttle |
|------------|---------------------------------------|---------------|
| 5811720500 | - | - |
| 5811720200 | - | - |
| 5811720100 | - | - |
| 5811720600 | - | - |
| 5811720300 | - | - |
| 5811720400 | - | - |
| 5811720000 | Basic valve without coil | - |
| 5811721500 | - | with throttle |
| 5811721200 | - | with throttle |
| 5811721100 | - | with throttle |
| 5811721600 | - | with throttle |
| 5811721300 | - | with throttle |
| 5811721400 | - | with throttle |
| 5811721000 | Basic valve without coil | with throttle |
| 5811722500 | - | - |
| 5811722200 | - | - |
| 5811722100 | - | - |
| 5811722600 | - | - |
| 5811722300 | - | - |
| 5811722400 | - | - |
| 5811722000 | Basic valve without coil | - |
| 5811723500 | - | with throttle |
| 5811723200 | - | with throttle |
| 5811723100 | - | with throttle |
| 5811723600 | - | with throttle |
| 5811723300 | - | with throttle |
| 5811723400 | - | with throttle |
| 5811723000 | Basic valve without coil | with throttle |

Nominal flow Qn at 6 bar and $\Delta p = 1$ bar, MO = Manual override

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

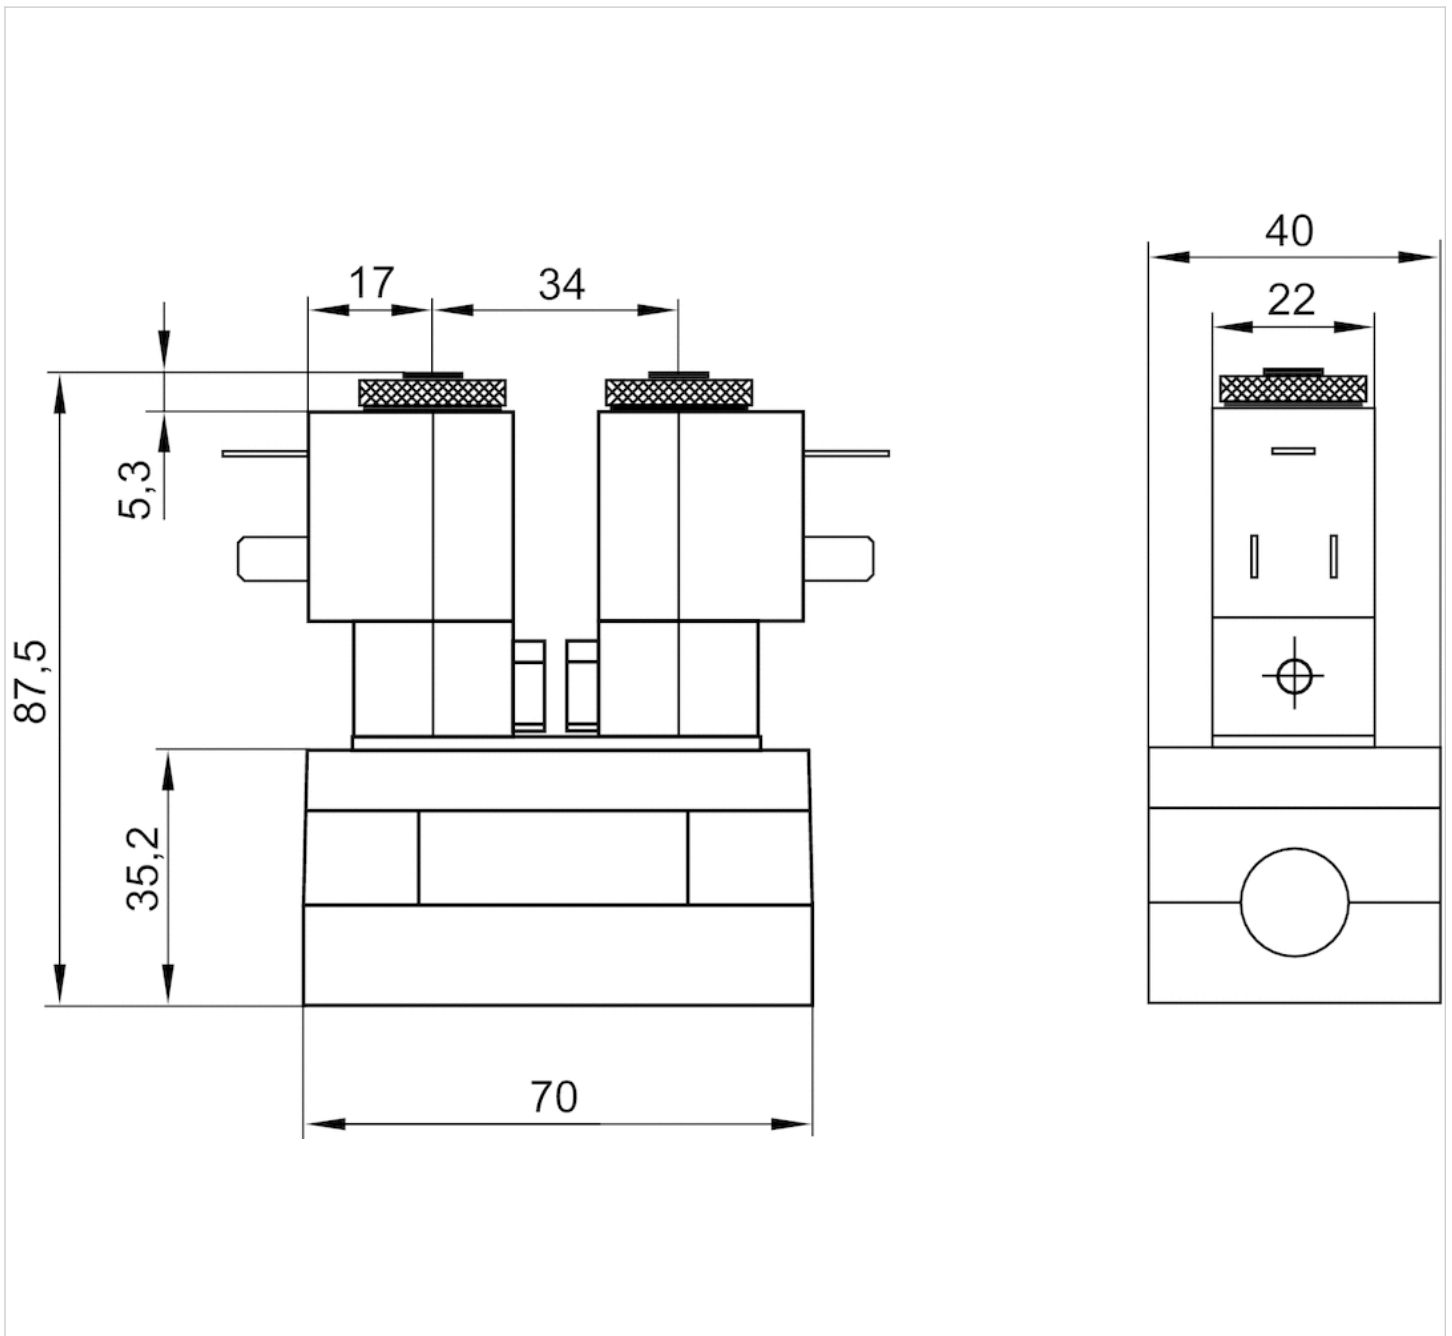
Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

| | |
|---------|----------------------------------|
| Housing | Polyamide fiber-glass reinforced |
| Seals | Acrylonitrile butadiene rubber |

Dimensions

Dimensions



The pilot valves can be loosened and turned through 180°.