Mounting clip, Series AS2-MBR-...-W03

- Polyamide

Ambient temperature min./max.	-10 ... 50 °C
Weight	0,015 kg

Technical data

Part No.
R412006370

Scope of delivery incl. 2 mounting screws M3x53-4.8-A2R according to EN ISO 7046-1 (countersunk screw with type H X-slot), 1x O-ring
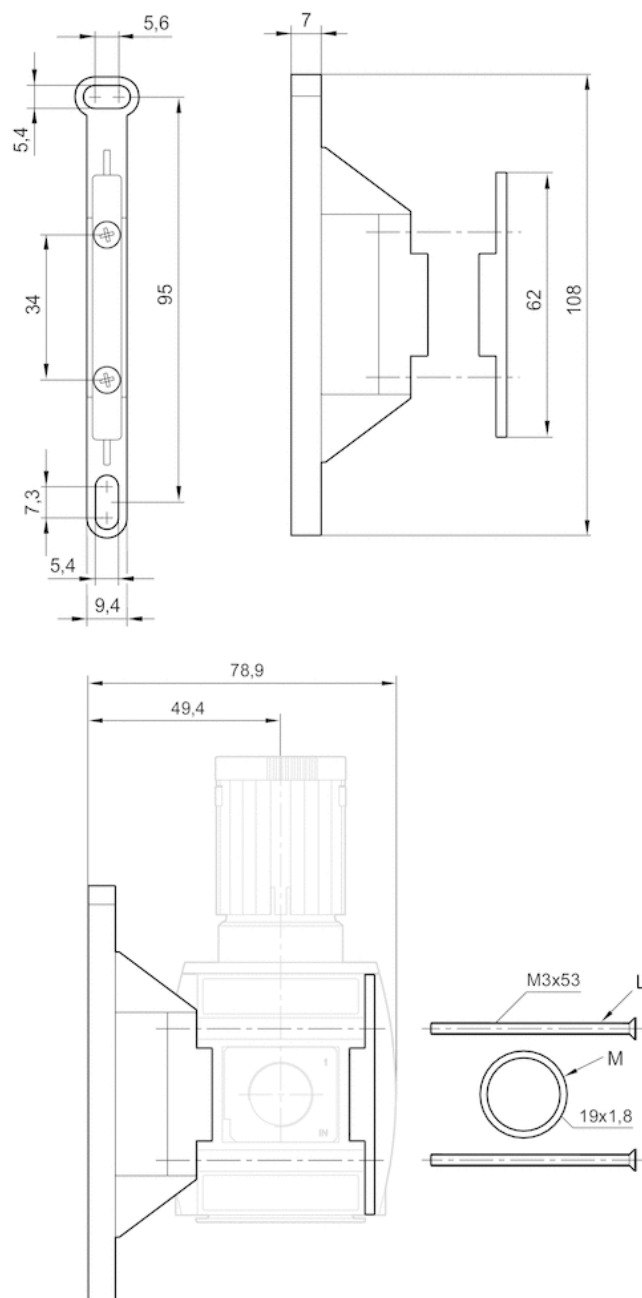
Suitable for use in Ex zones 1, 2, 21, 22.

Technical information

Material	
Housing	Polyamide
Seal	Acrylonitrile butadiene rubber

Dimensions

Dimensions in mm

L = Mounting screw
M = O-ring

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management

Visit us: Emerson.com/Aventics

Your local contact: Emerson.com/contactus

🔍 Emerson.com

📘 Facebook.com/EmersonAutomationSolutions

in LinkedIn.com/company/Emerson-Automation-Solutions

🐦 Twitter.com/EMR_Automation

EMERSON.

CONSIDER IT SOLVED™