

VEGA T electronic counter for mobile vehicles



www.isoilmeter.com

ISOIL
I M P I A N T I
The solutions that count

LEAFLET: PR/VE/0002
Edition February 2018



VEGA T electronic counter for mobile vehicles

The electronic counter **VEGA T** is the result of years of experience in the design and manufacturing of electronic equipment for downstream petrochemical industry.

VEGA T is designed primarily for road tank trucks, aviation dispensers and refueller applications.

Light weight, slim design and a large LCD display are the key features that make this electronic counter suitable for installation on all vehicles. The VEGA T is provided with a user friendly software granting flexibility and easiness of use.

The backlight display allows easy reading of information both day and night while the membrane keyboard includes a set of alphanumeric and function buttons to perform all the operations. One or two PD or turbine meters can be connected to the VEGA T using pulse emitters. Other meter types can also be used as long as a suitable pulse feed is provided.

Moreover, the VEGA T is an 'all in one' unit: power supply, output relay and circuits for one or two meters are all included within the slim anodized aluminum housing. Communication serial ports are designed for connection to printers and on board computers.

External devices such as pulse transmitters, temperature probes, valves and interlocks can be wired directly to the unit without the need for junction boxes / barriers.


Intrinsically safe circuits allow the use of devices belonging to the 'simple apparatus' category such as temperature sensors, start/stop pushbuttons and interlock inputs.

Besides, the VEGA T complies with the ATEX and MID Directives. It is explosion proof and it has a W/P rating of IP66.

Main functions

- » single or dual meter control for simultaneous operation
- » temperature compensation with any ASTM table
- » up to 8 products per meter
- » preset control
- » calibration curve correction
- » display of delivered net and gross volume, mass, flow rate and temperature during operation
- » clear view of information and prompts
- » range of flow rate and temperature control
- » self-diagnostics for internal parts and external devices
- » non-volatile memory for setups and more than 250 transactions
- » remote START/STOP control
- » level switch, interlocks control
- » two stage/ multistep or on/off preset valve control
- » override after preset capability
- » hoses and compartment valve selection
- » five communication ports for printers or devices for remote control of the system (Proprietary or ModBus protocol)
- » configurable print-out of tickets
- » intrinsically safe digital and analog inputs
- » highly accurate 4 wires Pt100 thermo probe inputs
- » driver identification via pin code
- » stand alone or on board computer controlled operations
- » configurable emergency functions
- » switch-on/off button on side of housing (optional)



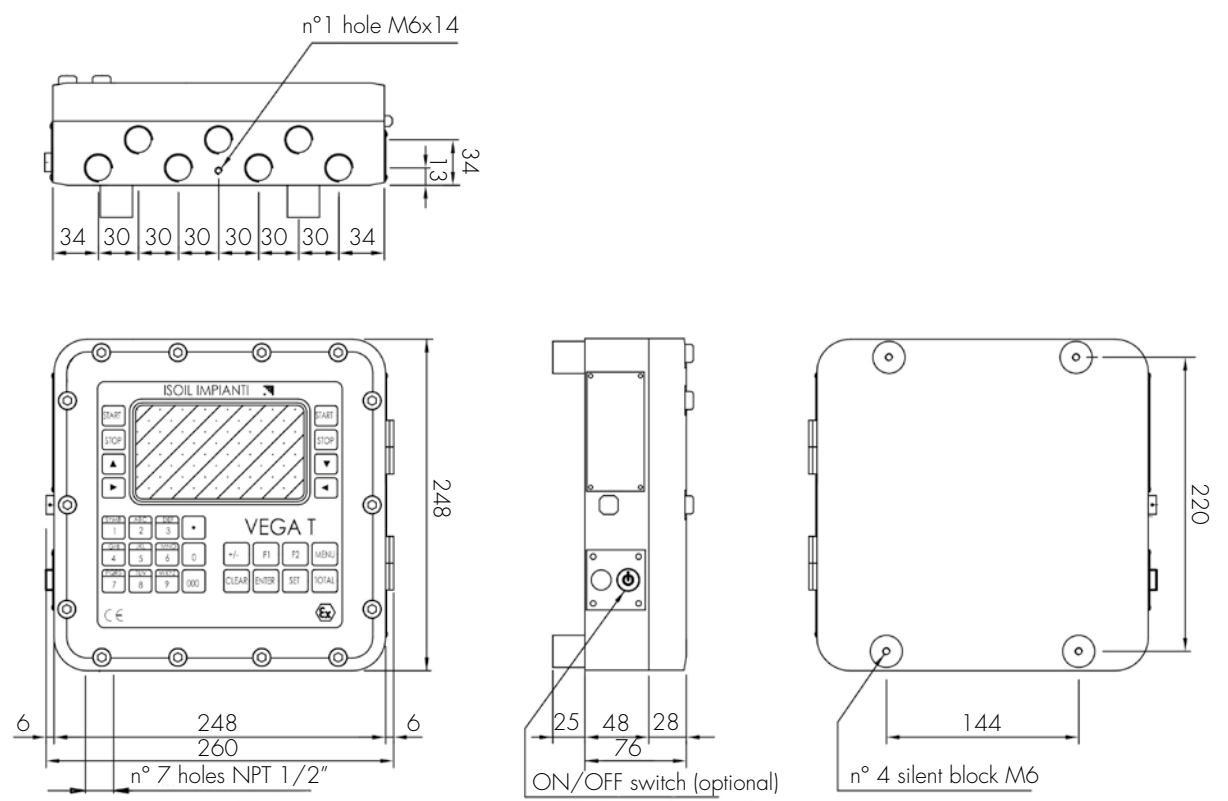

Size in mm



VEGA T electronic counter for mobile vehicles

Technical features

Power supply 10÷30VDC / 15W	Communication ports 2xRS232 (Tx, Rx, Com); 2xRS485 (2 wires); 1xRS422 (4 wires)
Working temperature -25 ÷ +55°C	
Storage temperature -25 ÷ +65°C	
Humidity 5 ÷ 95%UR	Dimensions 260x248x76 mm
Protection mode ATEX II 2 (1) G Ex d [ia Ga] ib IIB T6 Gb IP 66	Weight 7,5 Kg
Power output N° 12 I _{max} = 1A	Pulses Inputs from pulses transmission or CAN bus
Digital "ia" inputs N° 6	Cables entries N° 7x1/2" NPT
Analog "ia" inputs N° 2 for 3 or 4 wires Pt100	Fixing by N° 4 holes M6 - shock absorbers included

Models

VEGA T 3297 single meter - totalizer + preset VEGAT 3267 two meters - totalizer + preset	EM6422 pulse emitter EM6422/CAN pulse emitter with CAN bus protocol Thermoresistance probe Pt100 ISOIL ST series printers Support fixed or adjustable for on-meter coupling
VEGA T 4297 single meter - totalizer + preset + temperature volume compensation VEGAT 4267 two meters - totalizer +preset + temperature volume compensation	
Optional board 4 ÷ 20 mA	

Accessories

