


# INDUSTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for the measurement of pressure and temperature.

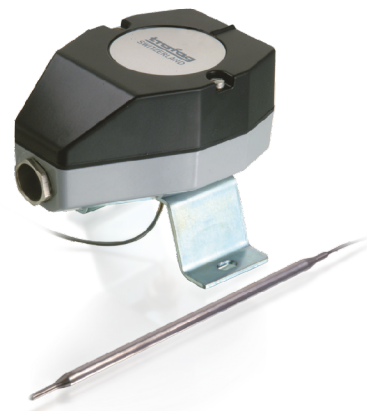

## Applications

- Railways
- Machine tools

## Features

- Compact design
- Rugged housing
- Protection IP65
- Any mounting position possible

## Technical Data

Designation of application	Industrial thermostat with remote sensor	Switching differential	Adjustable / not adjustable
Measuring range	-30°C ... +40°C to +70°C ... +350°C	Repeatability	± 0.5 % FS typ.
Output signal	Floating change-over contact	Approval / conformity	EN60730-1/ EN60730-2-9: Typ 2.B.H

01/2017

Data sheet H72110n

Subject to change

## Ordering information/type code

		XXX	XX	XX	XXX	XX	XXXXXXXXXX	XX	XX	
<b>Custom build code</b>	External adjustment	404								
	Internal adjustment	414								
<b>Microswitch</b>	Small switching differential, not adjustable		10							
	Average switching differential, not adjustable		11							
	With gold plated contacts, not adjustable		21							
	Adjustable large switching differential		24							
	Adjustable standard switching differential		25							
<b>Range</b>	<b>Range</b> [°C]	<b>Sensor max.</b> [°C]		<b>Range</b> [°C]	<b>Sensor max.</b> [°C]					
	-30 ... 40	50	01	-10 ... 80	85	95				
	-10 ... 25	60	07	5 ... 95	105	20				
	0 ... 35	70	09	20 ... 110	115	23				
	10 ... 45	85	11	20 ... 150	165	31				
	10 ... 80	100	13	20 ... 230	250	24				
	15 ... 30	60	17	40 ... 300	330	53				
	-10 ... 35	70	94	70 ... 350	380	54				
<b>Sensor <sup>1)</sup></b>	<b>Range</b>	<b>Sensor diameter</b> [mm]	<b>Sensor material</b>		<b>Range</b>	<b>Sensor diameter</b> [mm]	<b>Sensor material</b>			
	01, 07, 09, 11, 13, 17	Ø7	Stainless steel	421	94, 95, 20, 23, 31	Ø9	Copper	332		
	01, 07, 09, 11, 13, 17	Ø4.7	Copper	412	94, 95, 20, 23, 31	Ø4.7	Copper nickel plated	313		
	01, 07, 09, 11, 13, 17	Ø7	Copper	422	94, 95, 20, 23, 31	Ø7	Copper nickel plated	323		
	01, 07, 09, 11, 13, 17	Ø9	Copper	432	94, 95, 20, 23, 31	Ø9	Copper nickel plated	333		
	01, 07, 09, 11, 13, 17	Ø4.7	Copper nickel plated	413	24, 53, 54	Ø4.7	Stainless steel	111		
	01, 07, 09, 11, 13, 17	Ø7	Copper nickel plated	423	24, 53, 54	Ø7	Stainless steel	121		
	01, 07, 09, 11, 13, 17	Ø9	Copper nickel plated	433	24, 53, 54	Ø9	Stainless steel	131		
	94, 95, 20, 23, 31	Ø4.7	Stainless steel	311	24, 53, 54	Ø4.7	Copper	112		
	94, 95, 20, 23, 31	Ø7	Stainless steel	321	24, 53, 54	Ø7	Copper	122		
	94, 95, 20, 23, 31	Ø9	Stainless steel	331	24, 53, 54	Ø9	Copper	132		
	94, 95, 20, 23, 31	Ø4.7	Copper	312	24, 53, 54	Ø4.7	Copper nickel plated	113		
	94, 95, 20, 23, 31	Ø7	Copper	322	24, 53, 54	Ø7	Copper nickel plated	123		
	94, 95, 20, 23, 31	Ø9	Copper	332	24, 53, 54	Ø9	Copper nickel plated	133		
	<b>Fixing <sup>2)</sup></b>	Nut M10 (for remote sensing version)							10	
		Flange (for remote sensing version)							16	
		Angle bracket (for remote sensing version)							17	
		Bracket (for remote sensing version)							27	
		Grubscrew locked, lateral (direct mounting version)							12	
		Cap nut (for direct mounting version)							13	
Cap nut (for direct mounting version)								14		
Grubscrew locked with spacer (cooling element) (for direct mounting version)							18			
<b>Protection tube</b>	See data sheet H72114/H72163								XXXX.XXXX	

	XXX	XX	XX	XXX	XX	XXXXXXXXXX	XX	XX	
<b>Accessories</b>	Signal lamp							14	
	Switchpoint locking <sup>4)</sup>							15	
	Switchpoint fixed and sealed upon customer's request <sup>4)</sup>							88	
	Switchpoint preset upon customer's request, no guarantee on switching accuracy <sup>4)</sup>							83	
	Switchpoint adjustment please indicate when ordering:								
	- Switchpoint [°C]								
	- Increasing or decreasing								
	Condensator over Pin 1-2							12	
	Condensator over Pin 1-4							13	
	Condensators over Pin 1-2 / 1-4							23	
	Railway version (UIC 616)							28	
	Outdoor application (vented)							44	
	Capillary tube protection: Flexible metal tube, brass nickel plated							90	
	Capillary tube protection: Flexible metal tube 1.4541/V2A							91	
	Capillary tube protection: PVC tube							92	
<b>Capillary tube length</b>	Capillary tube length up to 5000 mm (no specification required for direct mounting on protection tube) L=XXXX <sup>3)</sup>								

<sup>1)</sup> See data sheet H72114/H72163

<sup>2)</sup> See data sheet H72106

<sup>3)</sup> Overlengths upon request

<sup>4)</sup> Only with type 414, internal adjustment





### Standard products (extra short lead time)

Product No.	Type Code	Sensor material	Temperature range [°C]	Switching differential [°C]	Sensor max. [°C]
I35	404 2509 422 27	Copper	0 ... +35	0.7 ... 10 (adjustable)	60
I40	404 2501 422 27	Copper	-30 ... +40	0.7 ... 10 (adjustable)	45
I95	404 2520 322 27	Copper	+5 ... +95	2 ... 12 (adjustable)	105
I150	404 2531 322 27	Copper	+20 ... +150	2.5 ... 16 (adjustable)	165
I230S	404 2524 121 27	1.4435/316L	+20 ... +230	3 ... 32 (adjustable)	250
I350S	404 2554 121 27	1.4435/316L	+70 ... +350	4 ... 40 (adjustable)	380
IS35	414 2509 422 27	Copper	0 ... +35	0.7 ... 10 (adjustable)	60
IS40	414 2501 422 27	Copper	-30 ... +40	0.7 ... 10 (adjustable)	45
IS95	414 2520 322 27	Copper	+5 ... +95	2 ... 12 (adjustable)	105
IS150	414 2531 322 27	Copper	+20 ... +150	2.5 ... 16 (adjustable)	165
IS230S	414 2524 121 27	1.4435/316L	+20 ... +230	3 ... 32 (adjustable)	250
IS350S	414 2554 121 27	1.4435/316L	+70 ... +350	4 ... 40 (adjustable)	380

Specifications		
<b>Accuracy</b>	Repeatability	$\pm 0.5\%$ FS typ.
	Scale accuracy typ.	$\pm 2\%$ FS typ.
	Switching differential	See table
	Switching point	Temperature compensated with bimetal switch lever
<b>Environmental conditions</b>	Ambient temperature	Range $\leq +45^{\circ}\text{C}$ : $-30^{\circ}\text{C} \dots +50^{\circ}\text{C}$ Range $+45^{\circ}\text{C} \dots +250^{\circ}\text{C}$ : $-30 \dots +70^{\circ}\text{C}$ Range $> +250^{\circ}\text{C}$ : $-10^{\circ}\text{C} \dots +70^{\circ}\text{C}$ (Important: Temperature at sensor may not exceed maximum sensor temperature)
	Storage temperature	Range $\leq +45^{\circ}\text{C}$ : $-30^{\circ}\text{C} \dots +50^{\circ}\text{C}$ Range $> +45^{\circ}\text{C}$ : $-30^{\circ}\text{C} \dots +85^{\circ}\text{C}$
	Protection	IP65
	Humidity	Max. 95 % relative
	Vibration	5...25 Hz: $\pm 1.6$ mm 25...100 Hz: 4g
	Shock	50g/ 11 ms
	<b>Mechanical Data</b>	Sensor housing
Filling		Liquid
Housing		AlSi9Cu3, coated
Screwed cable gland		Brass nickel plated
Installation		any position
Weight		$\sim 950$ g
<b>Microswitch</b>	Rating	See table
	Resistance of insulation	$> 2\text{ M}\Omega$
	Dielectric strength	$U \leq 250\text{V}$ : 1.45 kV / $U \leq 500\text{V}$ : 2 kV terminal ground
	Life time (mechanical)	Microswitch 10/11/25: 20 Mio. cycles Microswitch 21: 0.5 Mio. cycles Microswitch 24: 0.3 Mio. cycles
<b>Electrical connection</b>	Cable gland	M20x1.5 Cable- $\emptyset$ 4...10 mm
	Terminal screw	3 x 1...2.5 mm <sup>2</sup>


Additional information		
<b>Documents</b>	Data sheet	<a href="http://www.trafag.com/H72110">www.trafag.com/H72110</a>
	Instructions	<a href="http://www.trafag.com/H73111">www.trafag.com/H73111</a>
	Flyer	<a href="http://www.trafag.com/H70951">www.trafag.com/H70951</a>

## Dimensions

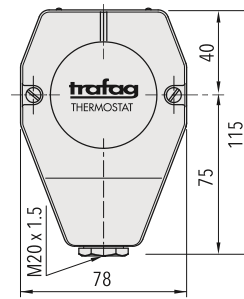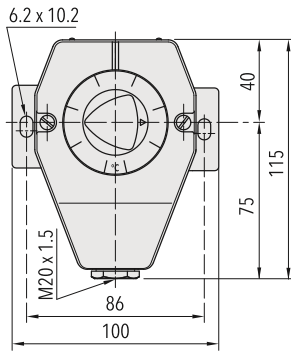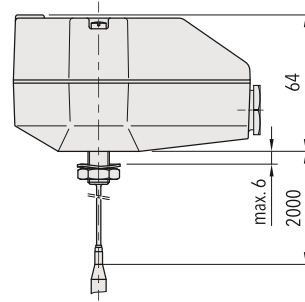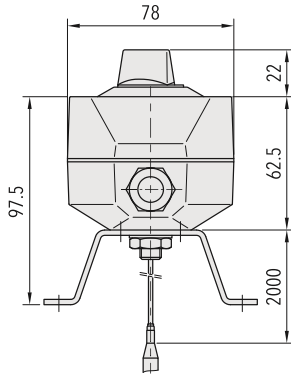

404.XXXX.XXX.27.XXXX.XXXX.XX

414.XXXX.XXX.10.XXXX.XXXX.XX

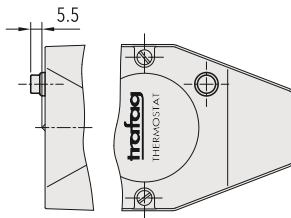

Accessory 14


## Switching differential typ.

<b>Range</b>	[°C]	-30 ... +40 -10 ... +25 0 ... +35 +15 ... +30 +10 ... +45 +10 ... +80	-10 ... +35 -10 ... +80 +5 ... +95 +20 ... +110	+20 ... +150	+20 ... +230	+40 ... +300 +70 ... +350
<b>Microswitch 10</b> Switching differential (fixed value, not adjustable)	[°C]	0.3	0.8	1	1.2	2
<b>Microswitch 11/21</b> Switching differential (fixed value, not adjustable)	[°C]	0.7	2	2.5	3	4
<b>Microswitch 24</b> Switching differential (adjustable value)	[°C]	4 ... 21	5.5 ... 26	7 ... 34	15 ... 65	18 ... 84
<b>Microswitch 25</b> Switching differential (adjustable value)	[°C]	0.7 ... 10	2 ... 12	2.5 ... 16	3 ... 32	4 ... 40


## Electrical data switch

Type	Features	Rating	
		Resistive Load (Inductive Load)	
		AC	DC
<b>10</b>	Small switching differential, not adjustable	125 V, 10 (1.5) A 250 V, 10 (1.25) A	250 V, 0.2 (0.02) A 125 V, 0.4 (0.03) A 30 V, 2 (1) A 14 V, 15 (2.5) A
<b>11</b>	Average switching differential, not adjustable	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (1.5) A
<b>21</b>	Gold plated contacts, not adjustable	24 V, 0.1 (0.1) A 12 V, 1 (1) A 5 V, 2 (2) A	24 V, 0.1 (0.1) A 12 V, 1 (1) A 5 V, 2 (2) A
<b>25</b>	Adjustable standard switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.25 (0.03) A 125 V, 0.5 (0.05) A 30 V, 6 (1.5) A 14 V, 15 (2.5) A
<b>24</b>	Adjustable large switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A

## Electrical Connection



404/414



with accessory 23