

G4 25000 Series Ø 25 mm (1.0-in) Can-Stack Stepper Motor Linear Actuators

High durability and exceptional performance. All units are built with dual ball bearings.

Generates higher force than other competitors

Multiple versions available

- Captive
- Non-Captive
- External Linear



Specifications


		Ø 25 mr	n (1.0-in) Motor			
	Captive	2544 –	- †	2554 –	†	
Part No.	Non-Captive	2534 –	- †	2584 –	- †	
	External Linear*	E2544 –	†	E2554 –	- †	
1	Wiring		Bip	olar		
Sto	ep angle	7.	7.5°		ō°	
Winding Voltage		5 VDC	12 VDC	5 VDC	12 VDC	
Current	Current (RMS)/phase		160 mA	385 mA	160 mA	
Resistance/phase		13 Ω	72 Ω	13 Ω	72 Ω	
Induct	tance/phase	10.8 mH	60 mH	8.08 mH	48 mH	
Power	Consumption	3.85 W				
Rotor Inertia		1.07 gcm ²				
Insulation Class		Class B				
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Weight		1.74 oz (49 g)			
Insulation Resistance		20 ΜΩ				

Lir	Order Code I.D.			
step inches mm			GOUG I.D.	
	0.0005	0.013	3	
7.5° Angle	0.001	0.0254	1	
7 tilglo	0.002	0.051	2	
	0.001	0.0254	1	
15° Angle	0.002	0.051	2	
7 11 1910	0.004	0.102	4	

Special drive considerations may be necessary when leaving shaft fully extended or fully retracted. Standard motors are Class B rated for maximum temperature of 130° C (266° F).

Captive Lead Screw


Dimensions = (mm) inches

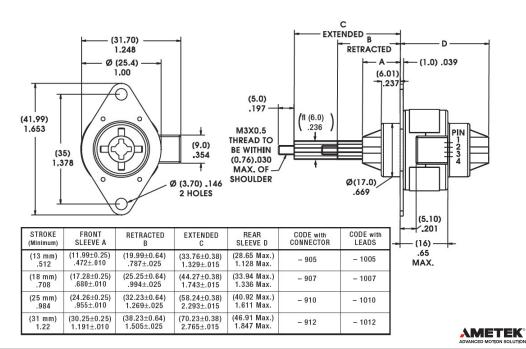

[†]Part numbering information on page 4.


Non-Captive Lead Screw

Dimensions = (mm) inches

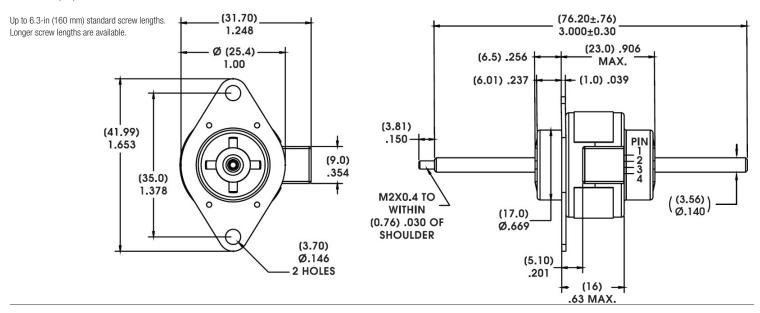


External Linear

Dimensions = (mm) inches

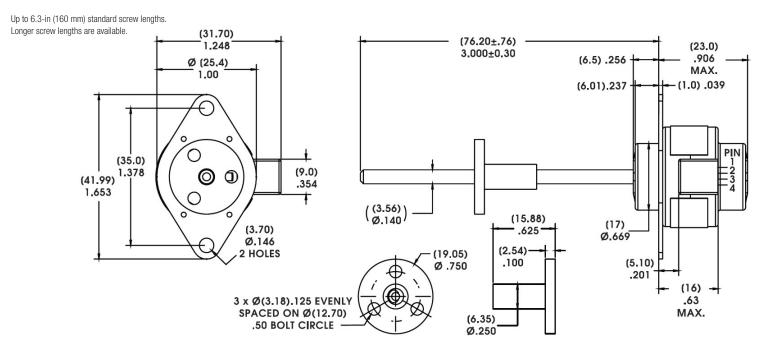

Connector

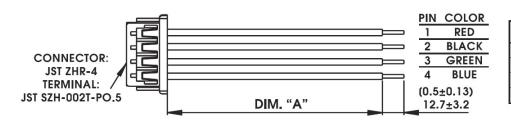


Part Number	Dimension "A"
56-1318-4	(24 ±0.39) 610 ±10 mm
56-1318-3	(18 ±0.39) 450 ±10 mm
56-1318-2	(12 ±0.39) 305 ±10 mm
56-1318-1	(6 ±0.39) 150 ±10 mm

AMETEK

G4 25000 Series • Can-Stack Stepper Motor Linear Actuators

FORCE vs. PULSE RATE


- L/R Drive
- Bipolar
- 100% Duty Cycle

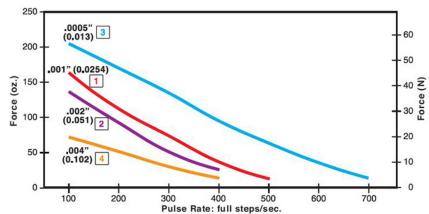

FORCE vs. PULSE RATE


- L/R Drive
- Bipolar
- 25% Duty Cycle

Obtained by a special winding or by running a standard motor at double the rated current.

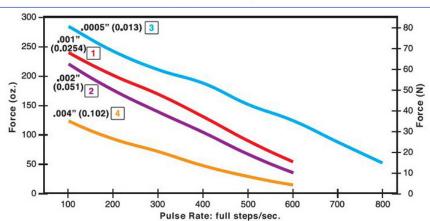


FORCE vs. PULSE RATE

- Chopper Drive
- Bipolar
- 100% Duty Cycle

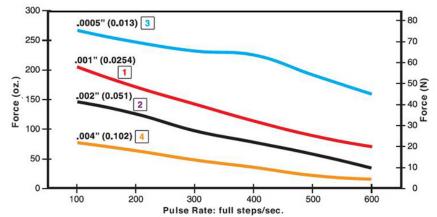

FORCE vs. PULSE RATE

- Chopper Drive
- Bipolar
- 25% Duty Cycle

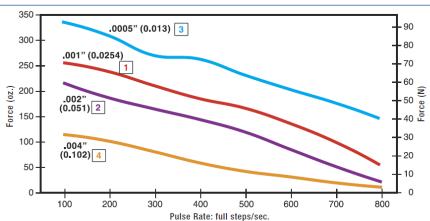

NOTE: All chopper drive curves were created with a 5 volt motor and a 40 volt power supply.

Ramping can increase the performance of a motor either by increasing the top speed or getting a heavier load accelerated up to speed faster. Also, deceleration can be used to stop the motor without overshoot.


ADVANCED MOTION SOLUTIONS

Identifying the Can-Stack Number Codes when Ordering

Е	25	5	4	4	12	1010
Prefix (include only when using the following) E = External K = External with 40° thread form P = Proximity Sensor S = Home Position Switch	Series Number Designation 25 = 25000 (Series numbers represent approximate diameters of motor body)	Style 3 = 7.5° Non-Captive 4 = 7.5° Captive or External (use "E" or "K" Prefix for External version) 5 = 15° Captive or External (use "E" or "K" Prefix for External version 8 = 15° Non-Captive	Coils 4 = Bipolar (4 wire)	Code ID Resolution Travel/Step 1 = .001-in (.0254) 2 = .002-in (.051) 3 = .0005-in (.013) 4 = .004-in (.102)	Voltage 05 = 5 VDC 12 = 12 VDC Custom V available	Suffix Stroke Example: -1010 = captive 25mm stroke with leads -XXX = Proprietary suffix assigned to a specific customer application. The identifier can apply to either a standard or custom part.

 $\textbf{NOTE:} \ \text{Dashes must be included in Part Number (-) as shown above. For assistance call our Engineering Team at 203 756 7441.$

Can-Stacks: Wiring



Can-Stacks: Stepping Sequence

	Bipolar	Q2-Q3	Q1-Q4	Q6-Q7	Q5-Q8	
EXTEND	Step					Ī
	1	ON	0FF	ON	OFF	\rangle
CW	2	OFF	ON	ON	OFF	CCW
	3	OFF	ON	OFF	ON	RACT
\downarrow	4	ON	OFF	OFF	ON	R
	1	ON	0FF	ON	OFF	

Note: Half stepping is accomplished by inserting an off state between transitioning phases.

AMETEK*

TFE Coated Lead Screws for applications that require a permanent, dry lubricant


Ideal for applications where conventional oils and greases cannot be used for lead screw lubrication.


Non-lubricated TFE Coated Lead Screw provides improved performance in both life and thrust as compared to a "dry" stainless steel lead screw. TFE can be applied to a wide variety of lead screw pitches. Available captive, non-captive and external linear.

Typical applications: where contamination from grease or lubricants must be avoided; silicon wafer handling, clean rooms, medical equipment or laboratory instrumentation.

Lead Screw Comparison: FORCE vs. PULSE RATE

- L/R Drive - 100% Duty Cycle

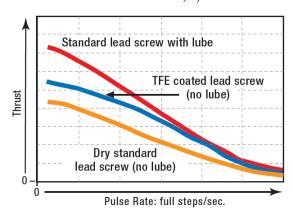




Miniature electronic home position switch capable of monitoring the home positions of linear actuators. The switch mounts on the rear sleeve of captive linear motors and allows the user to identify start, stop or home positions. Depending on your preference, contacts can be normally open or normally closed. The contact closure is repeatable to within one step position, identifying linear movements as low as 0.0005-in (0.0013 cm) per step. Multiple contact switches are also available.

Activation force of 10 oz (2.78 N) required therefore may not be appropriate for smaller can-stack actuators.

When ordering motors with the home position switch, the part number should be preceded by an "S".

Specifications	
Contact Ratings (Standard)	1.00 AMP @ 120 VAC 1.00 AMP @ 28 VDC
Operating Temperature	-30°C to +55°C (-22°F to 131°F)
Electrical Life	< 20 milliohms typ. initial at 2 - 4 V DC, 100 mA Tested to 60,000 make-and-break cycles at full load
Schematic	1



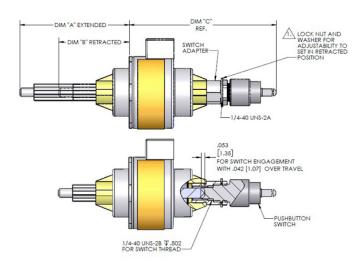







Stroke inches (mm)	Dim "A" Extended inches (mm)	Dim "B" Retracted inches (mm)	Dim "C" Ref. inches (mm)
.512 (13)	1.329 +/025 (33.76 +/- 0.64)	.787 +/025 (19.99 +/- 0.64)	2.051 +/025 (52.09 +/- 0.64)
.708 (18)	1.743 +/025 (44.27 +/- 0.64	.994 +/025 (25.25 +/- 0.64)	2.258 +/025 (57.35 +/- 0.64)
.984 (25)	2.293 +/025 (58.24 +/- 0.64)	1.269 +/025 (32.23 +/- 0.64)	2.534 +/025 (64.37 +/- 0.64)
1.22 (31)	2.765 +/025 (70.23 +/- 0.64)	1.505 +/025 (38.23 +/- 0.64)	2.770 +/025 (70.37 +/- 0.64)

End of Stroke Proximity Sensor incorporates a hall effect device, activated by a rare earth magnet embedded in the end of the internal screw

Compact profile of the sensor allows for installation in limited space applications. Virtually unlimited cycle life. Special cabling and connectors available.

Specifications			
Supply Voltage (VDC)		3.8 min. to 24 max.	
Current Consumption		10 mA max.	
Output Voltage (operated)		0.15 typ., 0.40 max. Sinking 20 mA max.	
Output Current		20 mA max.	
Output Leakage Current (released)		10µA max. @ Vout = 24 VDC; Vcc = 24 VDC	
Output Rise, 10 to 90		.05 μ s typ., 1.5 μ s max. @ Vcc = 12 V, RL = 1.6 KOhm	
Switching Time	Fall, 90 to 10%	.15 μs typ., 1.5 μs max. @ CL = 20 pF	
Tempe	erature	− 40 to +150°C	

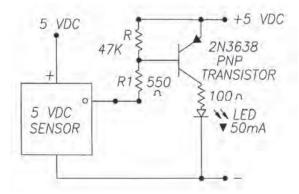

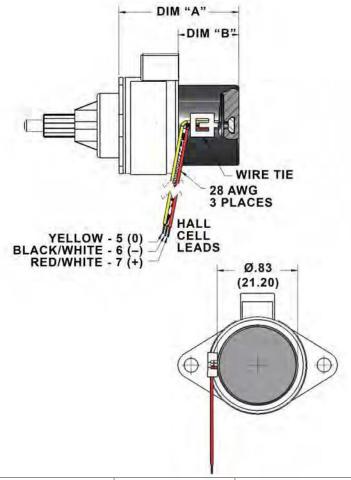

Stroke	Dim "A" Extended	Dim "B" Retracted
inches (mm)	inches (mm)	inches (mm)
.512 (13)	1.248 (31.71)	.632 (16.05)
.708 (18)	1.449 (36.81)	.833 (21.15)
.984 (25)	1.723 (43.76)	1.106 (28.10)
1.22 (31)	1.959 (49.76)	1.343 (34.10)

The sensor has virtually unlimited cycle life. Special cabling and connectors can also be provided.

G4 25000 Series E8T Encoder

G4 25000 Series E8T Transmissive Optical Encoder is designed to provide the digital quadrature encoder feedback for high volume, compact space applications.

- Resolutions from 180 to 720
- Single-ended / Differential
- Frequency response to 100 kHz
- Low power consumption, 5 V @ 30 mA max
- High retention polarized connector

Assembly Options:

- Differential line driver with complementary outputs
- Detachable cable
- Through-hole cover

Stroke inches (mm)	Dim "A" Extended inches (mm)
.512 (13)	N/A
.708 (18)	N/A
.984 (25)	.071 (1.80)
1.22 (31)	.307 (7.80)

